

II 第二章 信号控制装置 II

LED 信号灯



● KL 系列

认证事项



Φ8,10,12微
型按钮开关

Φ16微型
按钮开关

Φ8~30
金属按钮

Φ22,25,30
按钮开关

LED信号灯

指示灯
&
蜂鸣器

凸轮开关

控制开关盒

主控开关

动力押扣
开关

组合灯

KL 系列







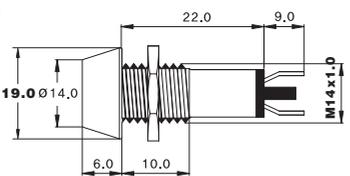
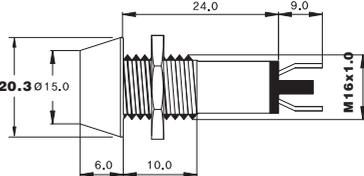
一般性能(KL 系列)

消耗电流	20mA以下(DC24标准), AC用10mA以下
电气寿命	50,000小时以上
介质耐压	500VAC 1分钟
绝缘电阻	100MΩ以上 500VDC
材 质	黄铜
环境温度	-25°C~60°C(无凝露、无结冰)

※可提供双色指示灯, 详情请咨询服务中心。

※如因提高质量而进行产品更改, 恕不另行通知。

※□颜色: R,G,Y,B,W

KL06	KL08
  <p>KL0612□ (12V) KL0624□ (24V) KL0611□ (110VAC) KL0622□ (220VAC)</p>	  <p>KL0812□ (12V) KL0824□ (24V) KL0811□ (110VAC) KL0822□ (220VAC)</p>
KL10	KL12
  <p>KL1012□ (12V) KL1024□ (24V) KL1011□ (110VAC) KL1022□ (220VAC)</p>	  <p>KL1212□ (12V) KL1224□ (24V) KL1211□ (110VAC) KL1222□ (220VAC)</p>
KL14	KL16
  <p>KL1412□ (12V) KL1424□ (24V) KL1411□ (110VAC) KL1422□ (220VAC)</p>	  <p>KL1612□ (12V) KL1624□ (24V) KL1611□ (110VAC) KL1622□ (220VAC)</p>